


Vector Frame Kit 19

VF-K-19

The innovative, contemporary and clean appearance of the Vector Frame™ line of exhibit kits will captivate your audience. Kits feature push-fit fabric graphics, easy-to-assemble extrusion frames, accent lighting, tables, counters, literature accessories, monitor mounts and interior LED edge lighting where indicated.

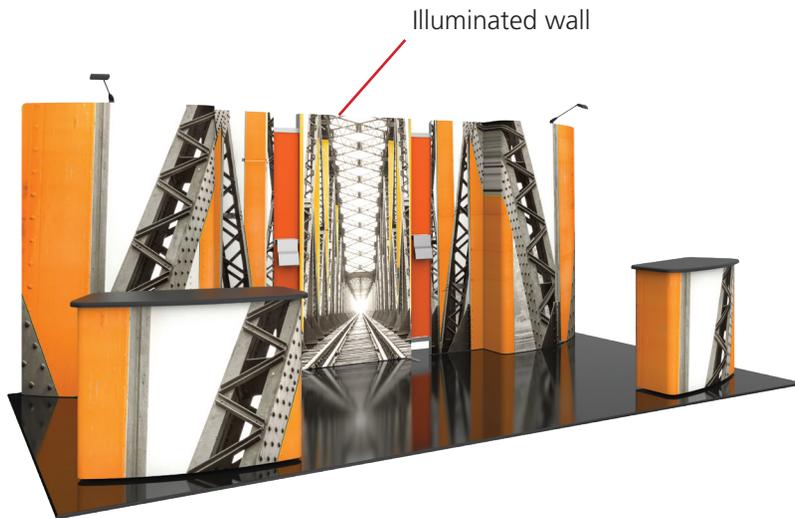

features and benefits:

- 50mm and 100mm silver extrusion frames
- Illuminated graphic panel with interior LED lighting top and bottom
- Single-sided SEG dye-sublimated push-fit fabric graphics
- Kit includes aluminum frame, four fabric graphic panels, four rigid graphic panels, one illuminated graphic panel, two fabric graphic counters, two 120 watt spot lights, two literature pockets and five wheeled molded cases
- Lifetime hardware warranty against manufacturer defects

dimensions:

Hardware

Assembled Unit:
232.2" w x 94.5" h x 25" d
5898mm(w) x 2400mm(h) x 635mm(d)

Approximate weight:
270 lbs / 123 kgs

Graphic

Refer to related graphic template for more information.

Visit:
www.exhibitors-handbook.com/graphic-templates

Shipping

Packing case(s):
1 OCE-2
1 OCH
2 OCH2

Shipping dimensions:
OCE-2: Expandable case length (l) may vary
40" - 66" l x 18" h x 18" d
1016mm-1677mm(l) x 458mm(h) x 458mm(d)

OCH:
50" l x 26" h x 12" d
1270mm(l) x 660mm(h) x 305mm(d)

OCH2:
52" l x 29" h x 15" d
1321mm(l) x 737mm(h) x 381mm(d)

Approximate total shipping weight:
379 lbs / 172 kgs

additional information:

Graphic material:
Dye-sublimated fabric

Counter top max weight = 100 lbs / 46 kgs

When included in a larger kit, a different packaging solution will be listed to accommodate all contents of the kit. Individual packaging no longer provided.

Tabletop Colors:



2 person assembly recommended:



We are continually improving and modifying our product range and reserve the right to vary the specifications without prior notice. All dimensions and weights quoted are approximate and we accept no responsibility for variance. E&OE. See Graphic Templates for graphic bleed specifications.

Included In Your Kit


Tools, Components, & Connectors



5MM ALLEN-T x1




CB9-R x4




CB10-R x4




PHFC2-6R-45-L-L x4



PHFC2-300-L-L x4



PMFC2-90-CAP x4




PHFC2-600-L-L x4



PHFC2-1155-L1-L x8




IB2 x8




PMFC2-90-1193-L1-L1 x4




TUBE-30-1155 x4




ES30 x2



CB9-S x4



PH-250-S-S x8



LN112-4 x2

Included In Your Kit

Tools, Components, & Connectors




FABRIC STEAMER-ES x1



STEP STOOL-BLUE x1



LUM-200-ORL x2

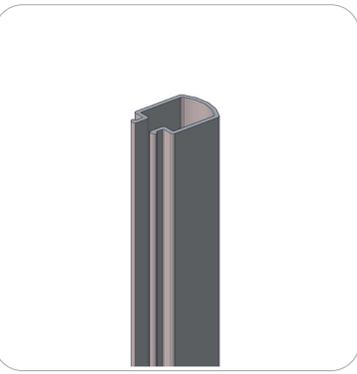

WME-1000 x2




LED-DB-PWRSUPPLY-2 x1



LED-DB-CL-2500-2 x1



LED-WHT-DB-1100 x2

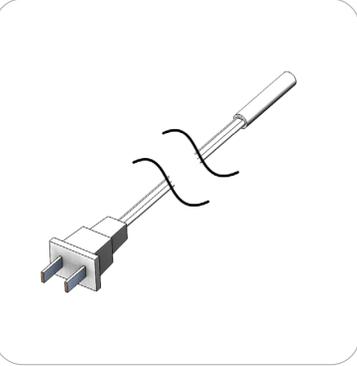


LED-DB-PWRCORD-2 x1

Included In Your Kit


Graphics




VF-19-A-G x1

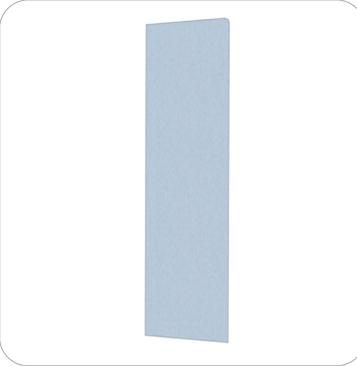

VF-19-B-G x1

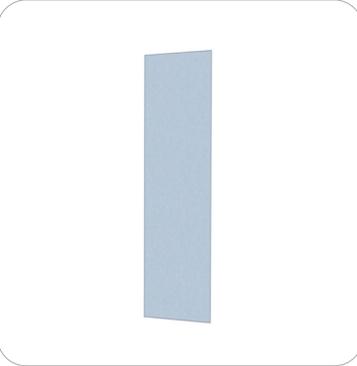


VF-19-C-G x1

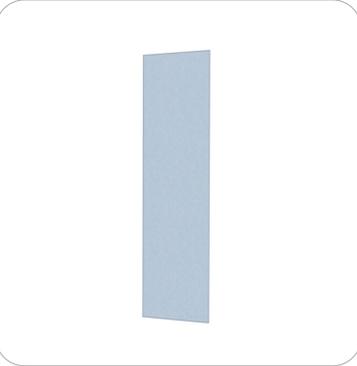


VF-19-D-G x1




VF-19-E-G x1

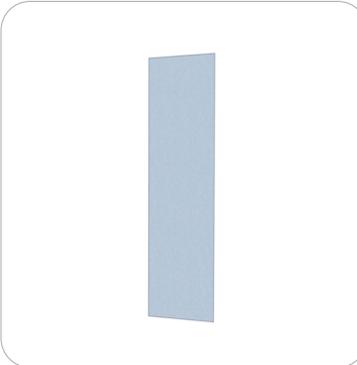

VF-19-F-G x1

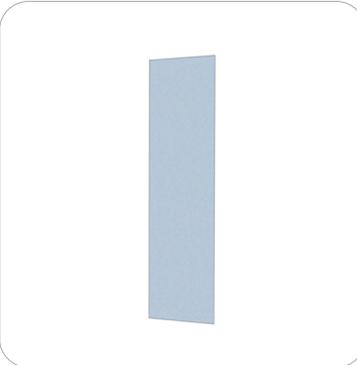

VF-19-G-G x1

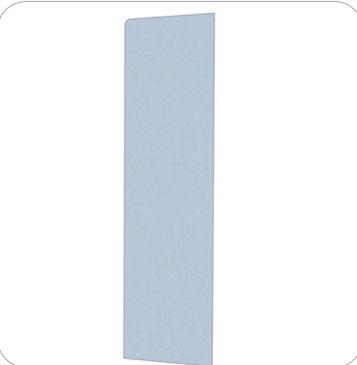

VF-19-H-G x1



VF-19-I-G x1



VF-19-J-G x1

Kits



VFC-02 x2




VF-LB-R-04 x1

Exploded View

VF-K-19


Section 1

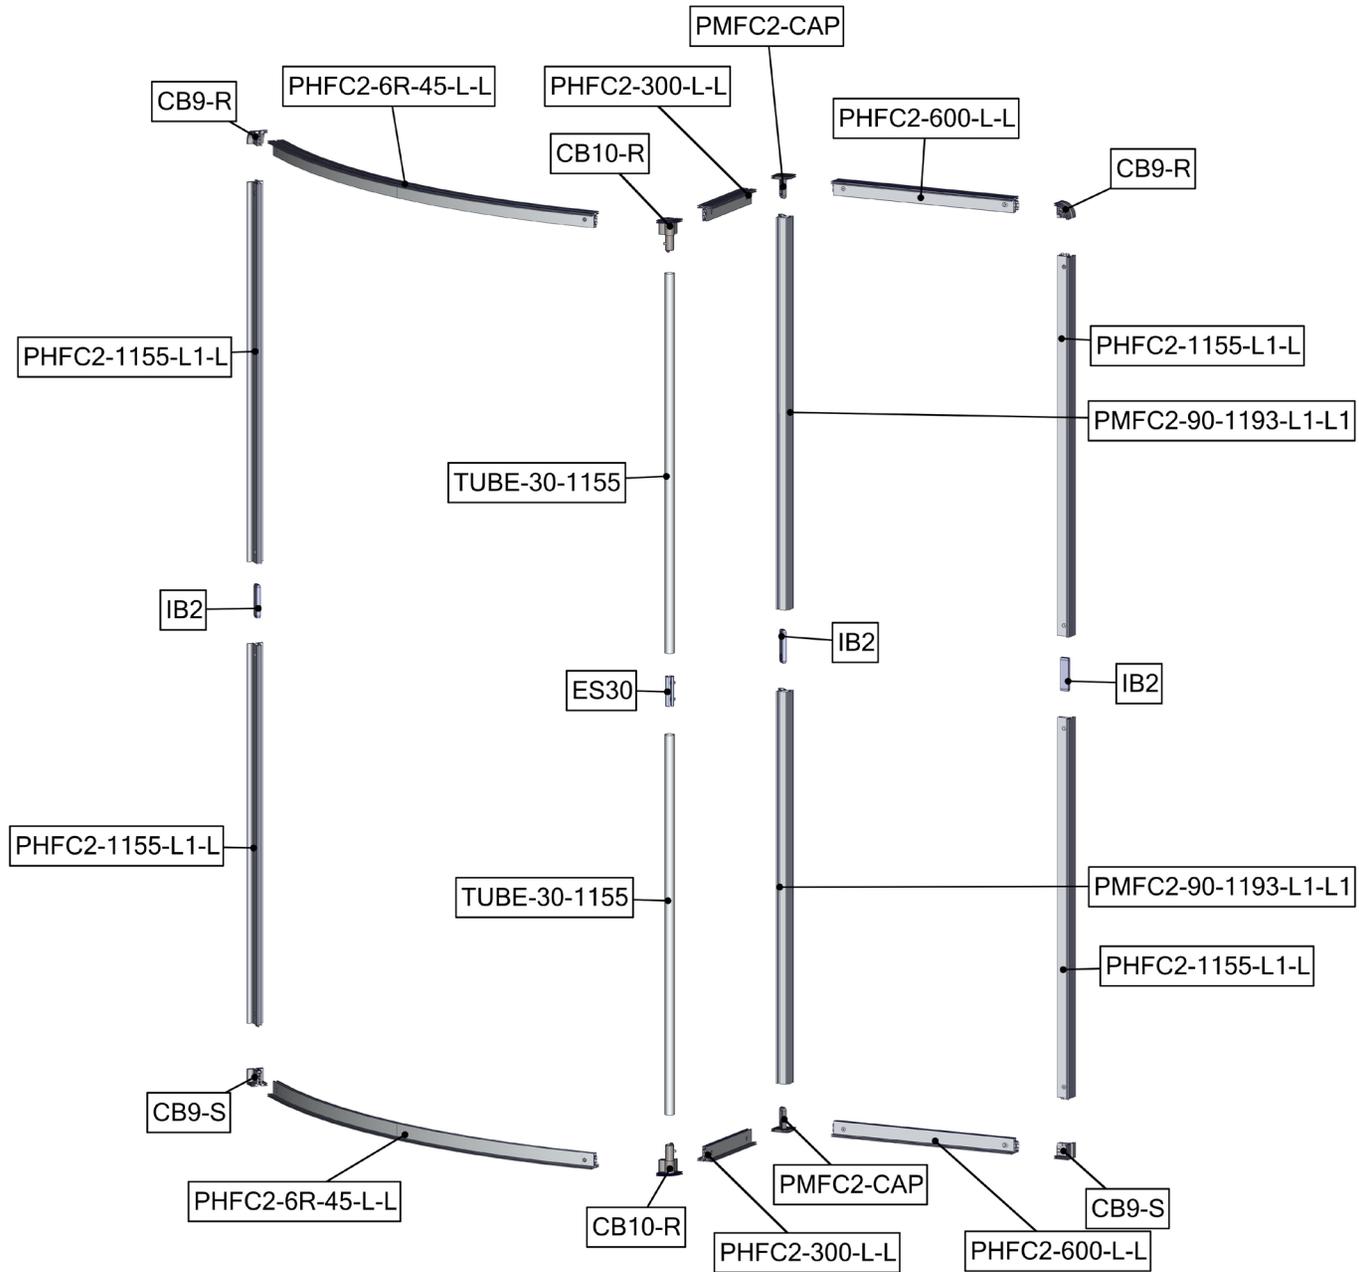

Exploded View

VF-K-19


Section 2

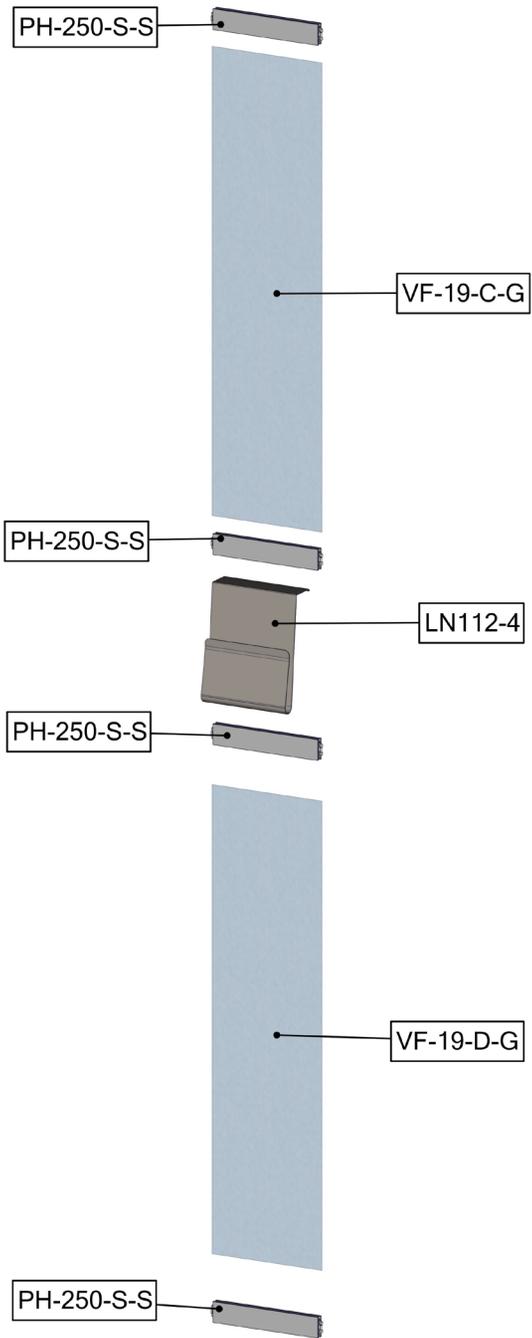

Exploded View

VF-K-19


Section 3

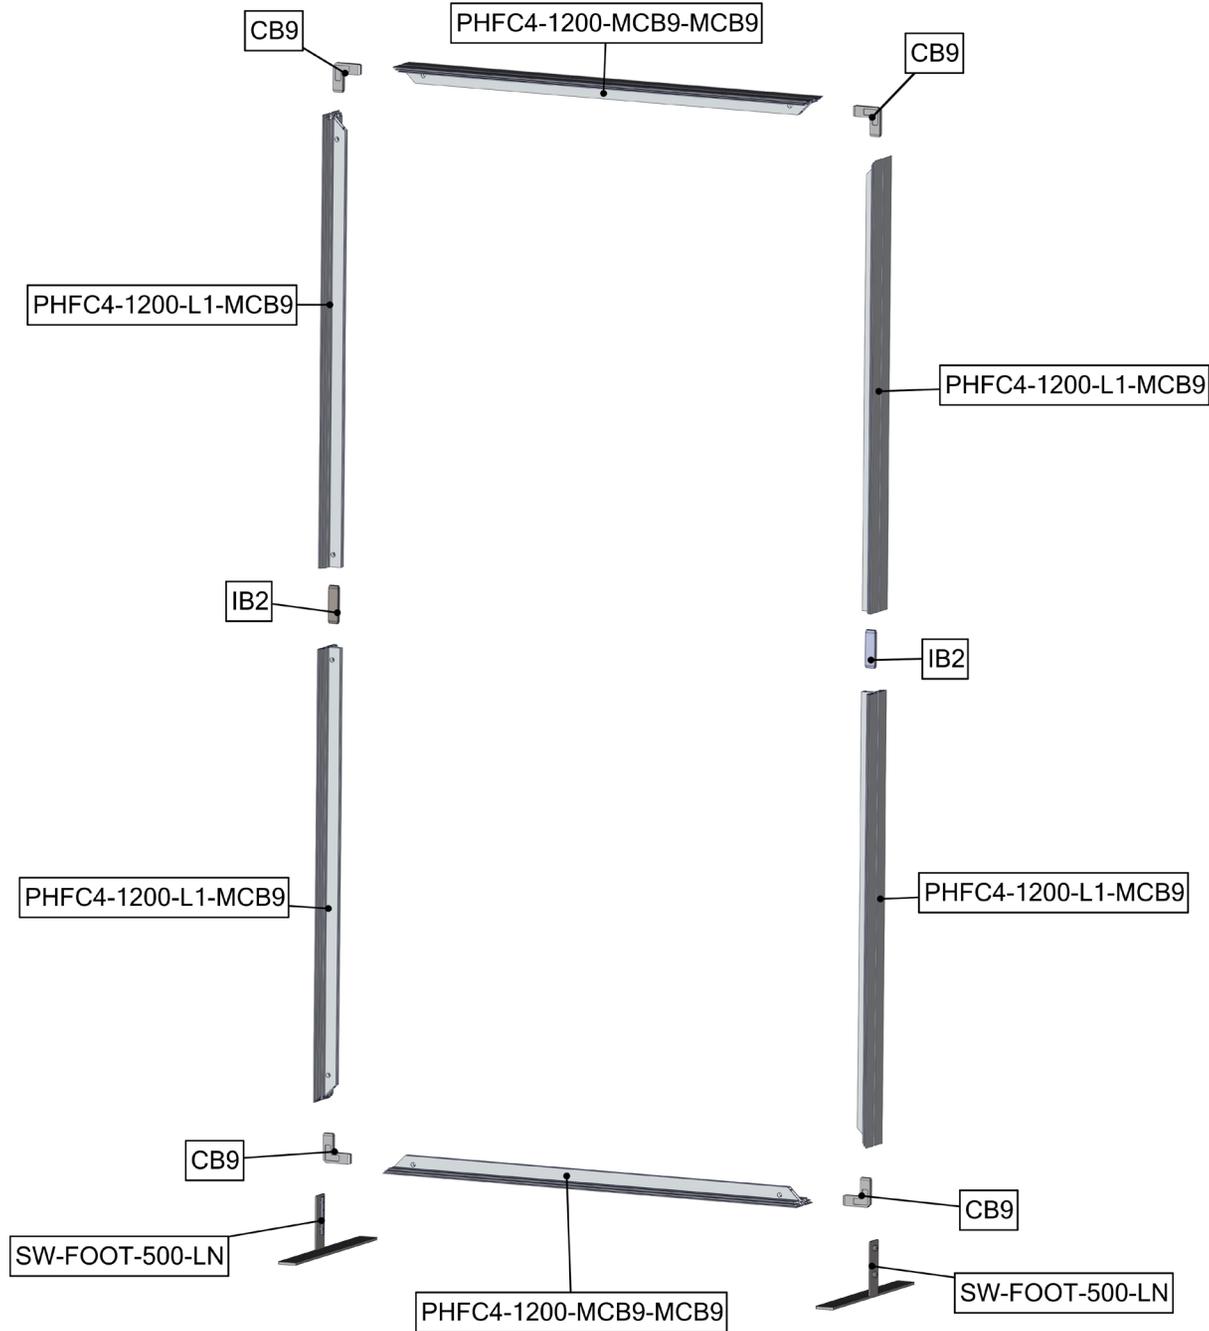

Exploded View

VF-K-19


Section 4

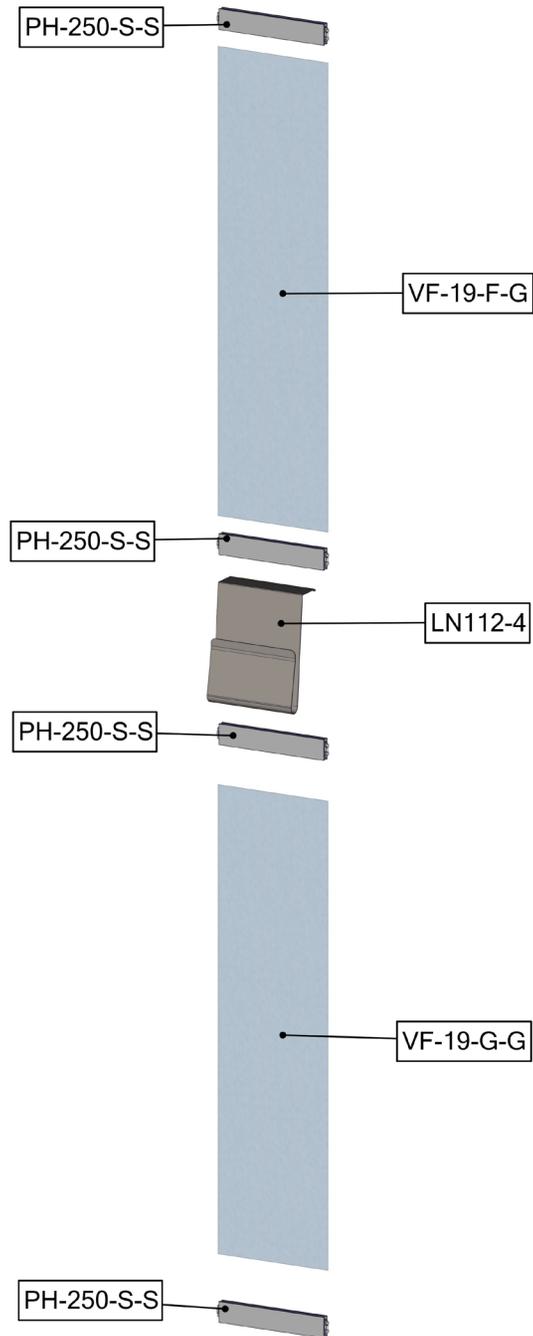

Exploded View

VF-K-19

Section 5

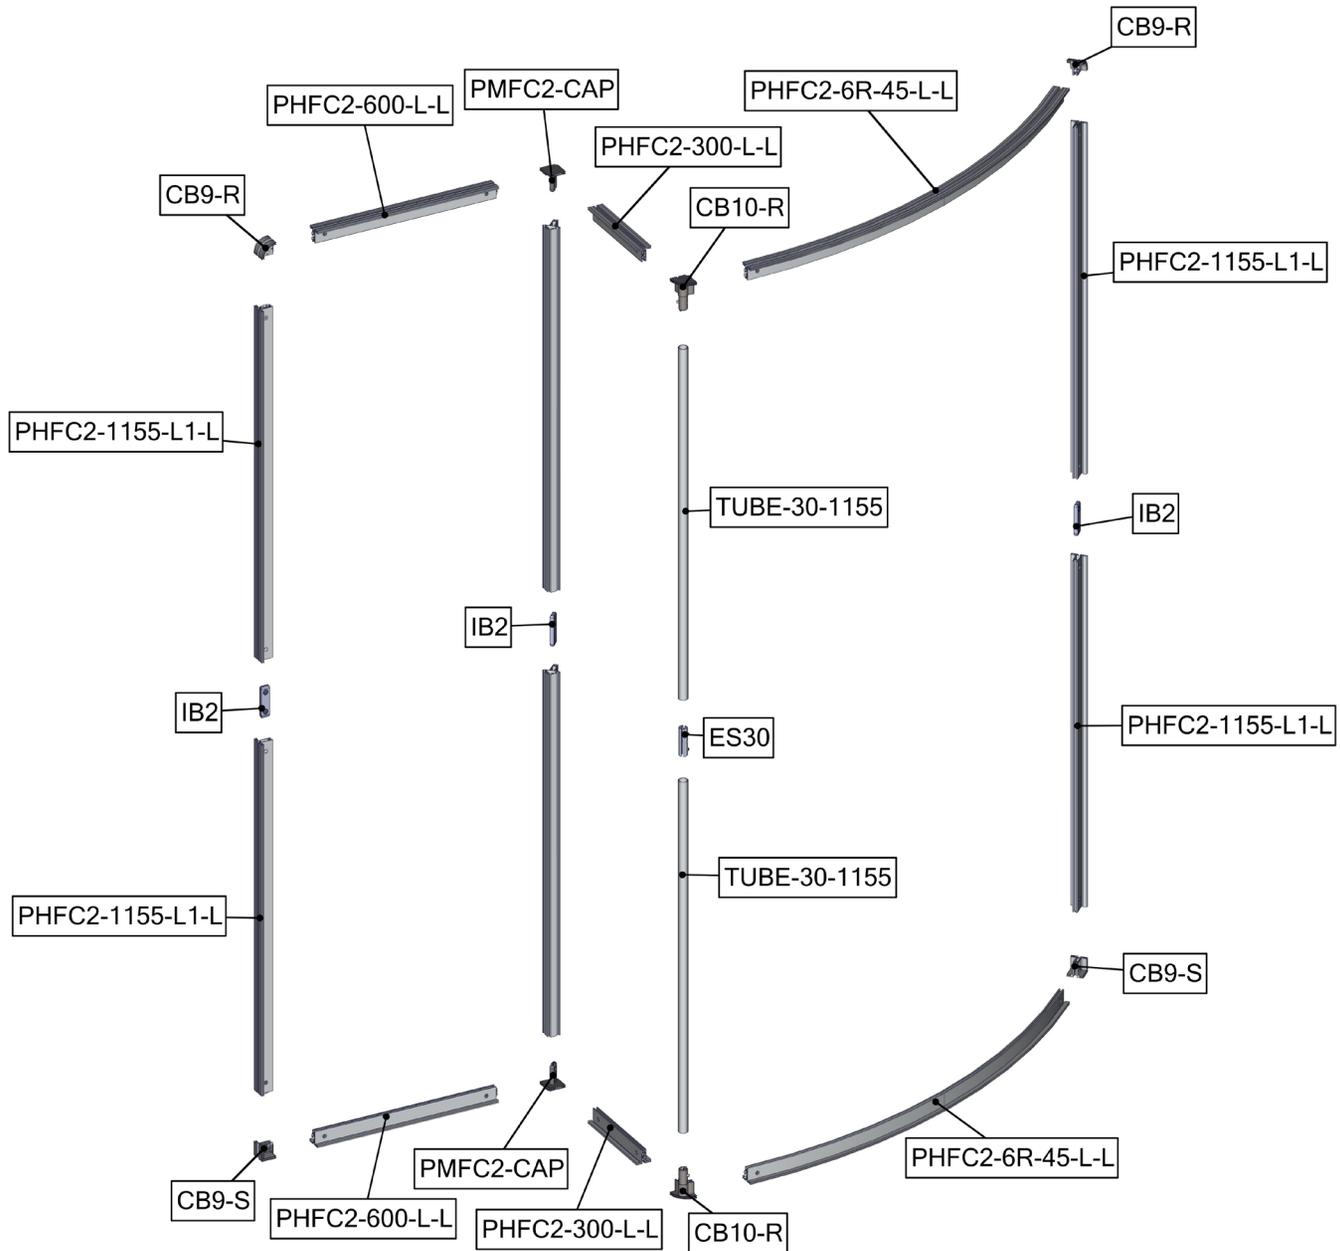


Internal Lighting Diagram

VF-K-19

Section 3

- VF-LB-R-04
See connection method 13 for lighting instructions.

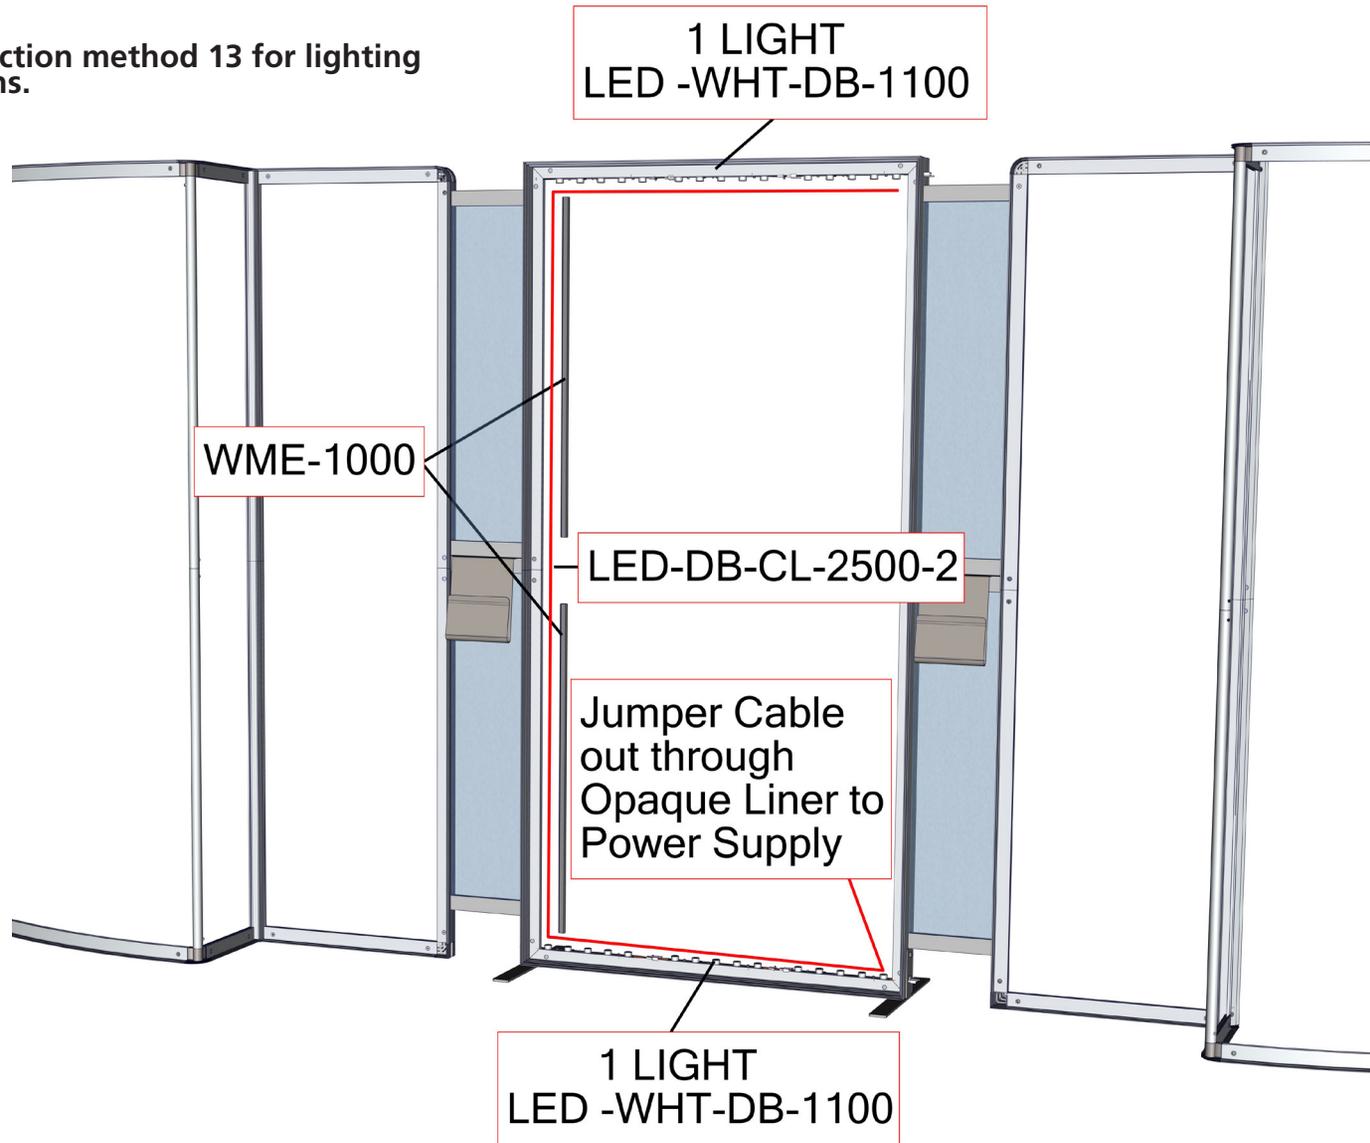

Connection Methods

Connection Method 1: PMFC2-90-CAP




First, press button to insert the cap into the extrusion. The button will snap in place.

Connection Method 2: PMFC2 / PHFC2




First, with the cam lock disengaged, place the cam lock teeth into the extrusion channel. Second, use the allen key tool to lock it in place. Make half turns clock-wise to engage the cam lock. Do not over tighten the lock buttons.

Connection Method 3: CB9-R / CB9-S

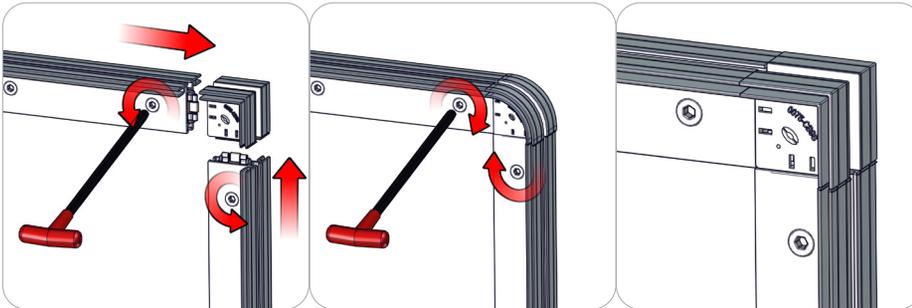

First, make sure the cam lock button is unlocked. Second, insert the cam lock teeth in to corner bracket channel. Third, tighten the cam lock button. Use the allen key tool to turn the lock buttons, make quarter turns and do not over tighten the lock buttons. Repeat for opposite end.


Connection Method 4: ES30

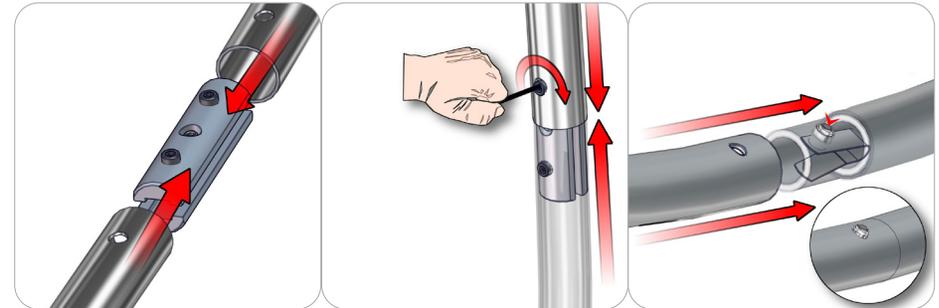

For spigot connections, compress the unlocked connector and slide into the tube lock access hole. Lock both screws carefully using your allen key tool. Be sure to lock securely, but do not over tighten. For snap button connections, locate the snap button on the connector or swage tube. Locate the hole on the corresponding tube. Press the snap button with your thumb and slide the tube and connector together so that the snap button snaps fully into the lock hole. To disassemble, press the snap button and pull apart.

Connection Methods

Connection Method 5: IB2

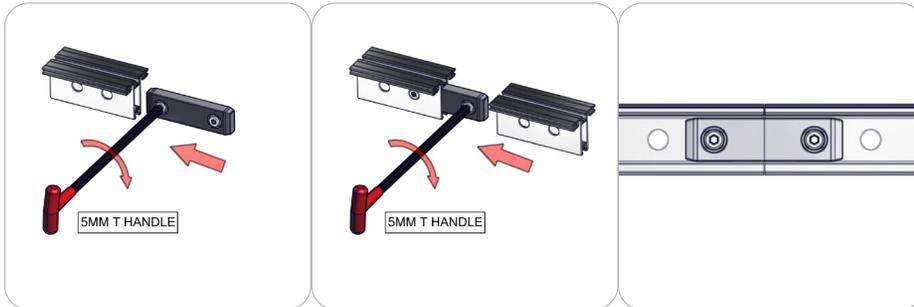


First, insert the in-line connector into the extrusion while holding in the lock button. Then, slide the next extrusion onto the same in-line connector again holding in the lock button. Finally, use the provided allen key to lock the in-line connector in place. Use the allen key tool to turn the lock buttons, make quarter turns and do not over tighten the lock buttons.

Connection Method 6: CB9




First, insert the corner connector into the extrusion while holding in the lock button. Then, slide the next extrusion onto the same corner connector again holding in the lock button. Finally, use the provided allen key to lock the corner connector in place. Use the allen key tool to press the lock buttons, make quarter turns and do not over tighten the lock buttons.

Connection Method 7: SW-FOOT-300/500/650

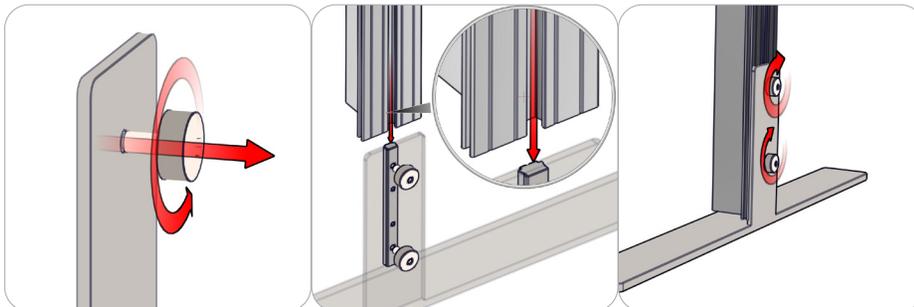

First, loosen the thumb screws and channel bars on the stabilizing bases. Do not disassemble them. Second, slide channel bars into the frame channel flush with the base of the frame. Finally, tighten the thumb screws and channel bars securing the attachment.


Connection Method 8: LUM-200

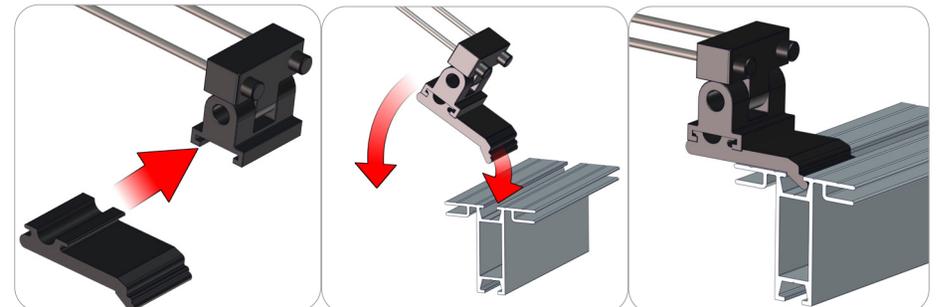

First, slide the light clip into the dove tail end of the spot light. Second, rest the light clip into the extrusion channel. Make adjustments to the spot light if necessary.


Connection Methods

Connection Method 9: CB10-R / PHFC2

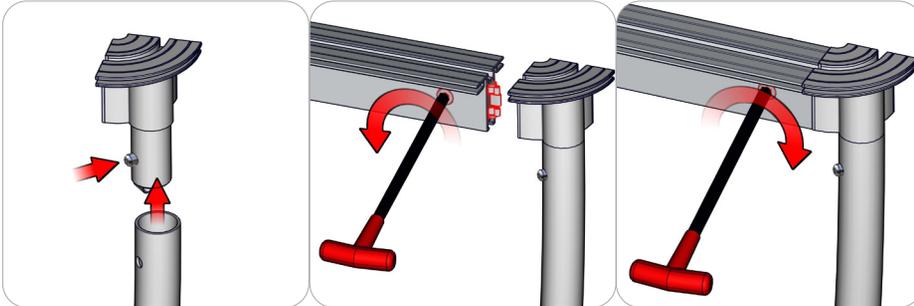


First, press and hold the snap button while you slide it into the tube. The snap button connection is secure when it protrudes through the tube hole. Second, using the allen key tool, disengage the cam lock in the extrusion end and place its teeth into the CB10-R channel. Third, with the cam lock teeth in the channel, use the allen key tool to engage the cam lock. Make a half turn to lock, do not over tighten. Repeat for opposite end.

Connection Method 10: Graphic Application

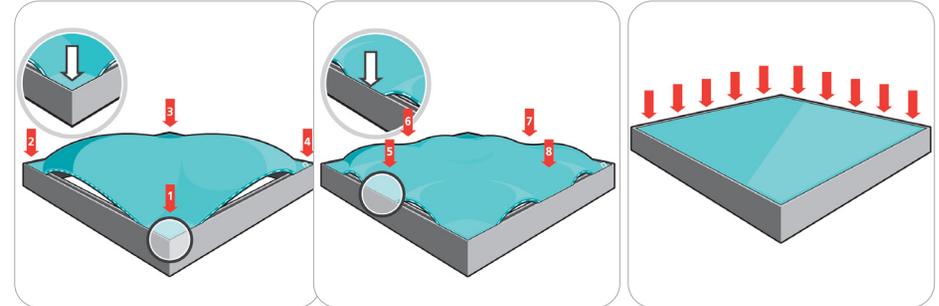


First, insert the silicone edge frame corners into the frame graphic channel (points 1 through 4). Second, insert the silicone edge frame sides into the frame graphic channel (points 5 through 8). Third, push the remaining silicone edge fabric into the frame graphic channel. Similar setup is recommended for the opaque liner. To remove these panels, simply pull the loop tag sewn near a corner.

Connection Method 11: LN112-4 / PH

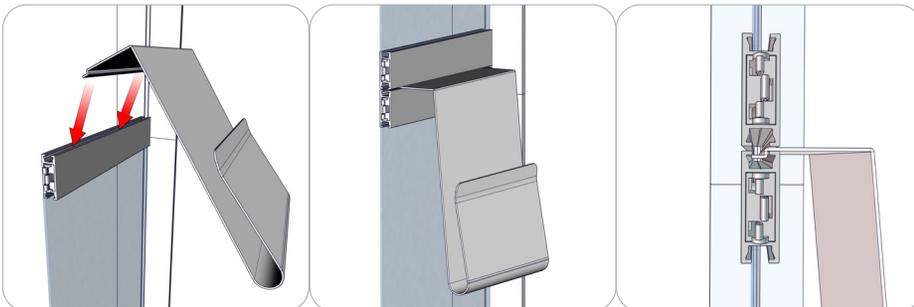

First, have a PH series profile or smaller extrusion with its channel facing up; lock it in place to hold the literature pocket. Second, rest the literature pocket flange into the extrusion top channel. Third, your kit may feature a second extrusion to lock right above the literature pocket.

Connection Method 12: PH-L / PH-S / PHFC2 / PHFC4

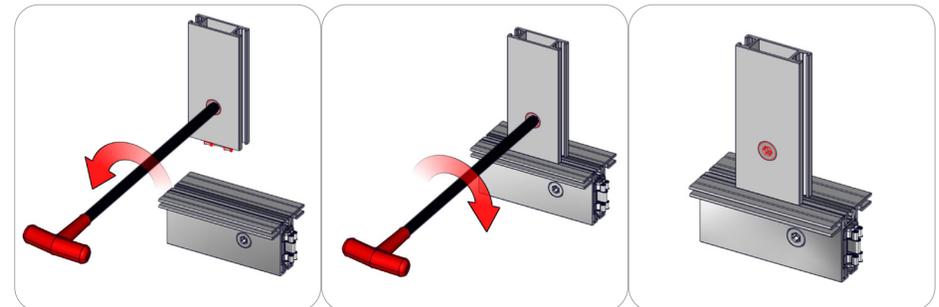

First, with the cam lock disengaged, place the cam lock teeth into the extrusion channel. Second, use the allen key tool to lock it in place. Make half turns clock-wise to engage the cam lock. Do not over tighten the lock buttons.

Connection Methods

Connection Method 13: Lighting Instructions



Lights are preattached to the top and bottom. To connect the proper wiring, first connect the LED-DB-CL-2500-2 male adapter to the female adapter of the lighting on the top extrusion. Step 2, attach the female end to the male end of the bottom lighting. Step 3, connect the the bottom end closest to the grommet, to the LED-DB-PWRSUPPLY-2 (and if 2 or more power supplies are needed you would attach the power supplies together). Step 4, connect the LED-DB-PWRSUPPLY-2-CL-300 extension to the top of the power supply. Run the other end of the LED-DB-PWRSPLY-2-CL-300 to the grommet hole. Step 5, connect the LED-DB-PWRSPLY-2-CL-300 to the LED-DB-PWRCORD-2. Last, plug into wall outlet. Last Step, use WME to hold wiring in place.



Kit Assembly

Step by Step

Step 1.

Locate all components necessary to assemble frame section 1. Place the components in the order as shown in Exploded View section 1.

Reference Connection Methods 1-5 and 9 for more details.

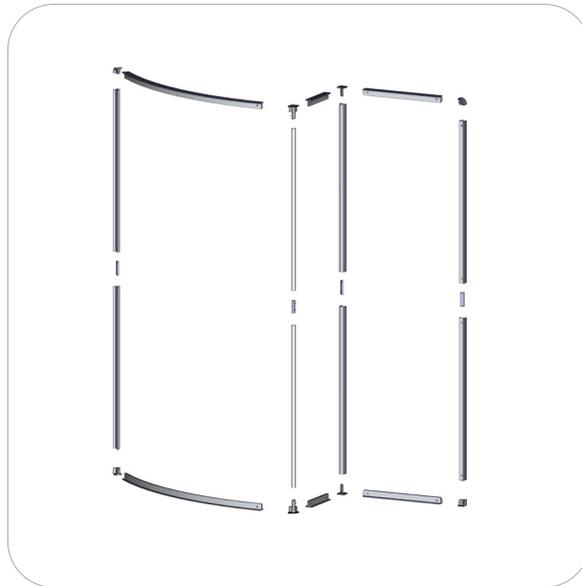

Step 2.

Locate all components necessary to assemble frame section 3 (VF-LB-R-04). Place the components in the order as shown in Exploded View section 3.


Reference Connection Methods -PDF Attach for VF-LB-R-04



Step 3.

Locate all components necessary to assemble frame section 5. Place the components in the order as shown in Exploded View section 5.


Reference Connection Methods 1-5 and 9 for more details.



Step 4.

Locate all components necessary to assemble frame section 2. Place the components in the order as shown in Exploded View section 2. Combine sections 1, 2 and 3.

Reference Connection Method 11 and 12 for more details.





Kit Assembly

Step by Step

Step 5.

Locate all components necessary to assemble frame section 4. Place the components in the order as shown in Exploded View section 4. Combine sections 3, 4 and 5.


Reference Connection Method 11 and 12 for more details.

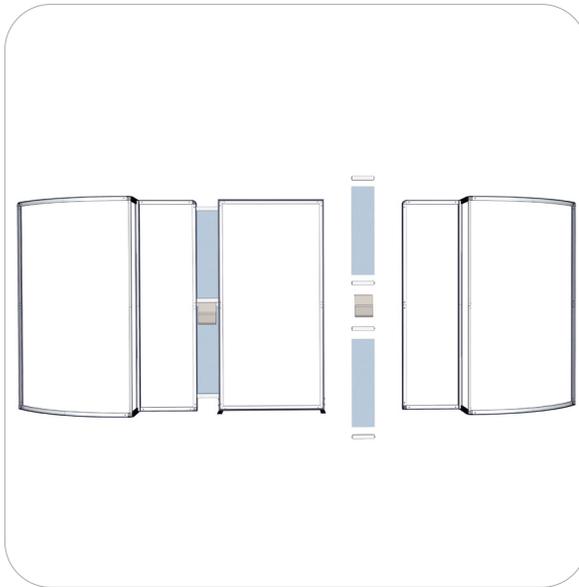

Step 6.

Gather the components necessary for the internal lighting setup to your light box section 3. Assemble in the order the Internal Lighting Diagram instructs. Test the light connections.


Refer to Connection Method 13 for additional information.

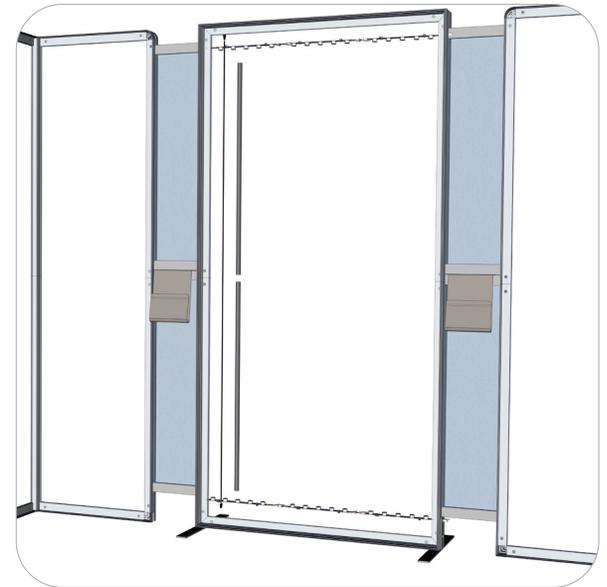

Step 7.

Locate your silicone edge graphic panels and opaque liner. Push the silicone edges of the graphic panel into the fabric channels of the extrusion frame perimeter. Push the silicone edges of the opaque liner into the fabric channels of the extrusion frame perimeter.

Refer to Connection Method 10 for additional information.

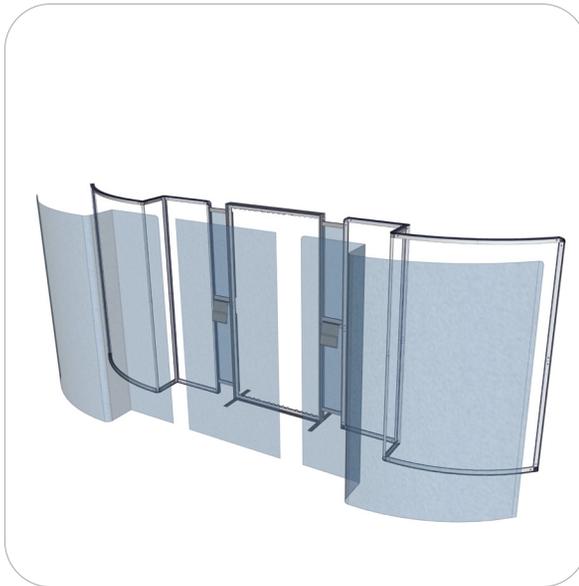

Step 8.

Gather the two spot lights, attach them to the top of the frame.

Refer to Connection Method 8 for additional information.

Setup is complete.

